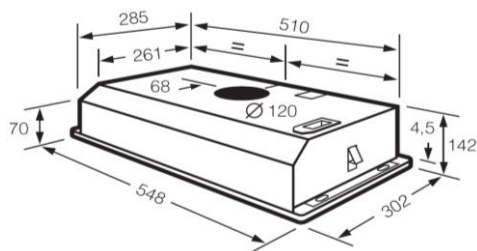


HOODS - FAGOR

932011644

AF2-627IX

01 - GENERAL DESCRIPTION		DETAILS
TYPE		CANOPY
INSTALATION		BUILT-IN
DOUBLE TURBINE MOTOR		NO
ASPIRACION PERIMETRAL		NO
MOTOR LOCATION		INTEGRATED
NUMBER OF SPEED SETTINGS		3
BOOST POSITION		NO
CONTROL PANEL		SLIDER
TYPE OF LAMPS		INCANDESCENT LIGHT
EVACUATION MODE		YES
RECYCLING MODE		YES (CONVERTIBLE)
MINIMUM DISTANCE FROM GAS HOBS (MM)		650
MINIMUM DISTANCE FROM ELECTRIC HOBS (MM)		550
EASY TO CLEAN INTERNAL DESIGN		NO
O2 PURIFICATION		NO
02 - STANDARD EQUIPMENT		DETAILS
TYPE OF CONTROL		MECHANIC
M DISPLAY LCD		NO
SPEED DISPLAY		NO
AUTOMATIC MOTOR SWITCH OFF		NO
NUMBER OF LAMPS		2
GREASE FILTER MATERIAL		MODULAR METALIC FILTER
NUMBER OF FILTERS		2
NO-RETURN AIRFLOW FLAP		YES
FILTER SATURATION SIGNALING		NO
AUTOMATIC OPERATION SENSOR		NO
M ADJUSTABLE LIGHTING INTENSITY		NO
M INSULATION SYSTEM		NO
03 - TECHNICAL DATAS		DETAILS
MAXIMUM OUTPUT AIR EXTRACTION (M3/H)		200
DRAUGHT CAPACITY IN SPEED 2		305
DRAUGHT CAPACITY IN SPEED 3		400
DRAUGHT CAPACITY IN SPEED 4		N/A
CAP. ASP. RECIRCULACION S/N 61591 NIVEL MAX		260
SOUND POWER SPEED 2		55
M SOUND POWER SPEED 3		60
M SOUND POWER SPEED 4		65
SOUND POWER S/N 60704-3 SPEED 4		N/A
RECIRCULATION SOUND POWER S/N 60704-3 MAXIMUM LEVEL		71
04 - ACCESORIES		DETAILS
M CARBON FILTER (OPTIONAL)		AFC-150
05 - ELECTRICAL CONNECTION		DETAILS
TOTAL POWER (W)		360
TOTAL POWER OF THE MOTORS (W)		140
TOTAL POWER OF THE LAMPS (W)		80
VOLTAGE/ FREQUENCE (V/HZ)		220-240V/50Hz
CURRENT (A)		10
06 - LOGISTICS DATAS		DETAILS
DIMENSIONS (H x W x D) (MM)		120 x 548 X 302
CHIMNEY REGULATION DIMENSIONS MAX-MIN (MM)		794 / 1140
NET WEIGHT (KG)		9.4