


HOODS - FAGOR

932012215

AF3-647X

| 01 - GENERAL DESCRIPTION | | DETAILS |
|--|--|------------------------|
| TYPE | | TELESCOPIC |
| INSTALATION | | UNDER FURNITURE |
| M DOUBLE TURBINE MOTOR | | NO |
| M ASPIRACION PERIMETRAL | | NO |
| MOTOR LOCATION | | INTEGRATED |
| NUMBER OF SPEED SETTINGS | | 3 |
| BOOST POSITION | | NO |
| CONTROL PANEL | | SLIDER |
| TYPE OF LAMPS | | INCANDESCENT LIGHT |
| EVACUATION MODE | | YES |
| RECYCLING MODE | | YES (CONVERTIBLE) |
| M MINIMUM DISTANCE FROM GAS HOBS (MM) | | 650 |
| M MINIMUM DISTANCE FROM ELECTRIC HOBS (MM) | | 550 |
| EASY TO CLEAN INTERNAL DESIGN | | YES |
| M O2 PURIFICATION | | NO |
| 02 - STANDARD EQUIPMENT | | DETAILS |
| TYPE OF CONTROL | | MECHANIC |
| M DISPLAY LCD | | NO |
| M SPEED DISPLAY | | NO |
| M AUTOMATIC MOTOR SWITCH OFF | | NO |
| NUMBER OF LAMPS | | 2 |
| GREASE FILTER MATERIAL | | MODULAR METALIC FILTER |
| NUMBER OF FILTERS | | 2 |
| NO-RETURN AIRFLOW FLAP | | YES |
| M FILTER SATURATION SIGNALING | | NO |
| M AUTOMATIC OPERATION SENSOR | | NO |
| M ADJUSTABLE LIGHTING INTENSITY | | NO |
| M INSULATION SYSTEM | | NO |
| 03 - TECHNICAL DATAS | | DETAILS |
| M MAXIMUM OUTPUT AIR EXTRACTION (M3/H) | | 230 M3/H |
| M DRAUGHT CAPACITY IN SPEED 2 | | 330 |
| M DRAUGHT CAPACITY IN SPEED 3 | | 400 |
| M CAPACIDAD ASPIRACIÓN EN VELOCIDAD 4 | | N/A |
| M SOUND POWER SPEED 2 | | 64 |
| M SOUND POWER SPEED 3 | | 69 |
| M SPOUND POWER SPEED 4 | | N/A |
| 04 - ACCESORIES | | DETAILS |
| M FILTRO DE CARBONO (OPCIONAL) | | AFC-303 |
| 05 - ELECTRICAL CONNECTION | | DETAILS |
| TOTAL POWER (W) | | 330 |
| TOTAL POWER OF THE MOTORS (W) | | 250 |
| TOTAL POWER OF THE LAMPS (W) | | 80 |
| VOLTAGE/ FREQUENCE (V/HZ) | | 230V/50Hz |
| CURRENT (A) | | 10 |
| 05 - LOGISTICS DATAS | | DETAILS |
| DIMENSIONS (H x W x D) (MM) | | 120 x 598 x 295 |
| CHIMNEY REGULATION DIMENSIONS MAX-MIN (MM) | | 794 / 1140 |
| M NET WEIGHT (KG) | | 9.4 |

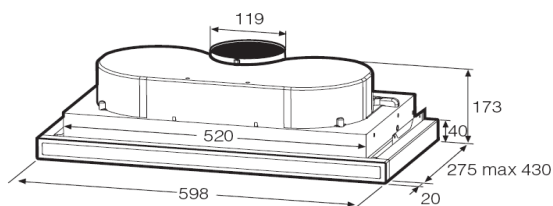